




Universal LS Series Doors are designed for standard applications and are made to provide years of maintenance free performance. These doors are perfect for a wide array of applications in commercial, industrial, institutional and residential high-rise buildings.

- Manufactured from paintable Galvanneal steel as a standard with an option to add a secondary prime coat.
- Available in 20ga, 18ga and 16ga.
- Door Thickness 1 3/4" (standard).
- Available with pre-expanded paper honeycomb (Standard), polystyrene(optional) cores.
- Fire rating available with UL or WHI Labels:20GA : Up to 90 minutes
18/16GA : Up to 180 minutes

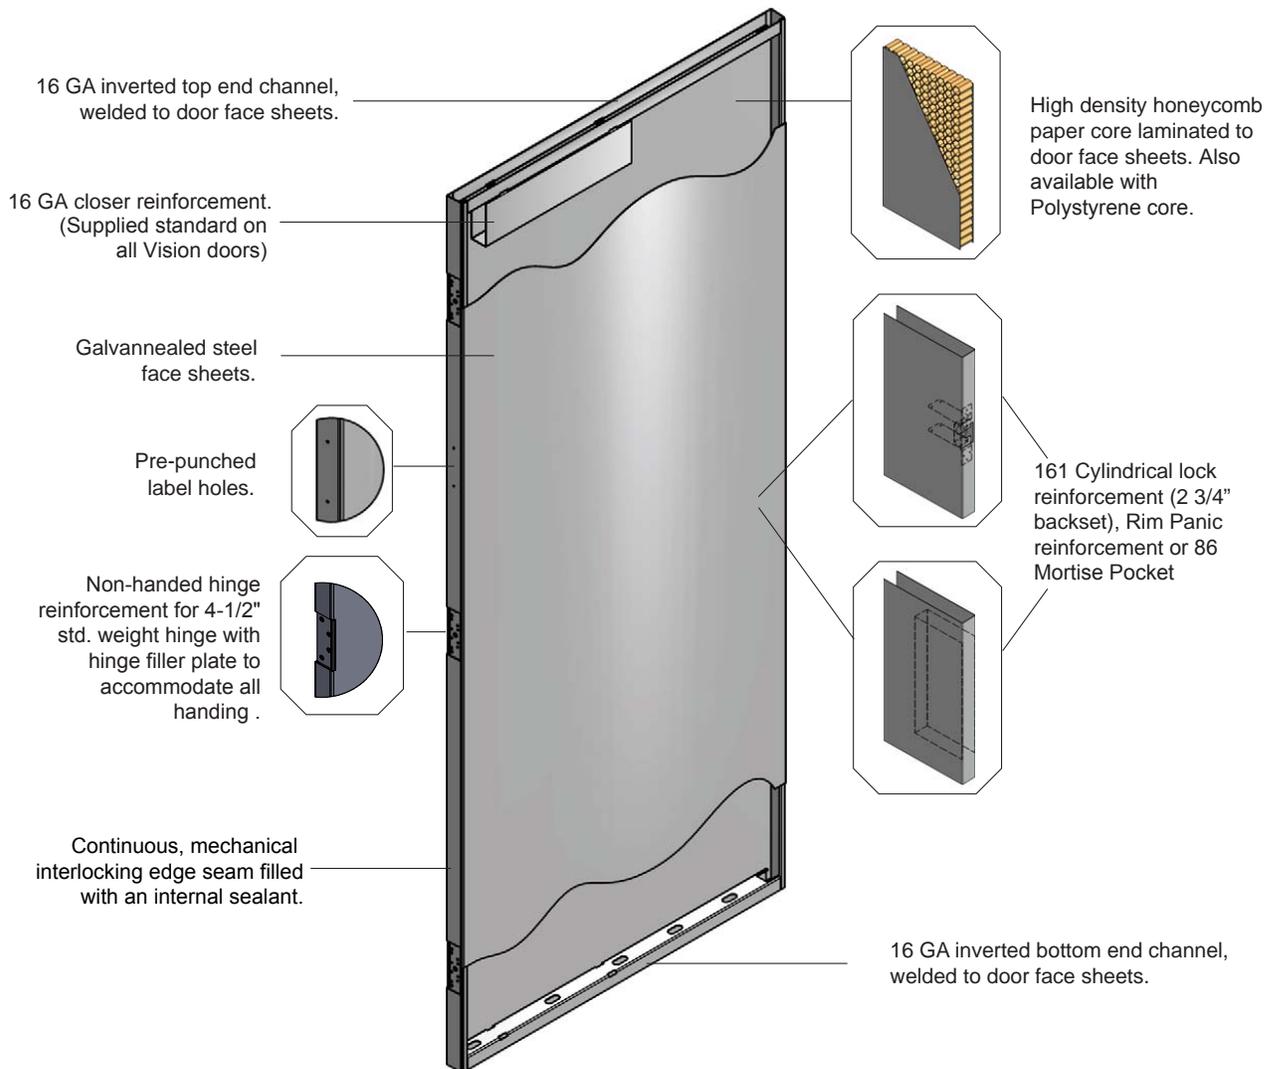


NON HANDED HINGE REINFORCEMENT AND FILLER PLATE


D-2

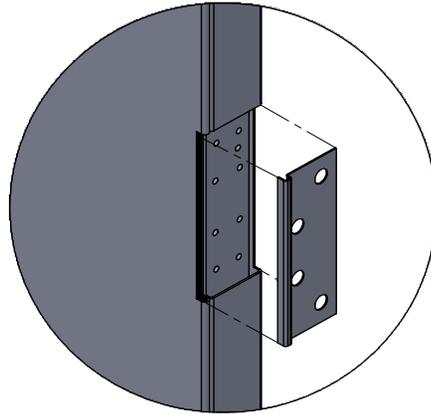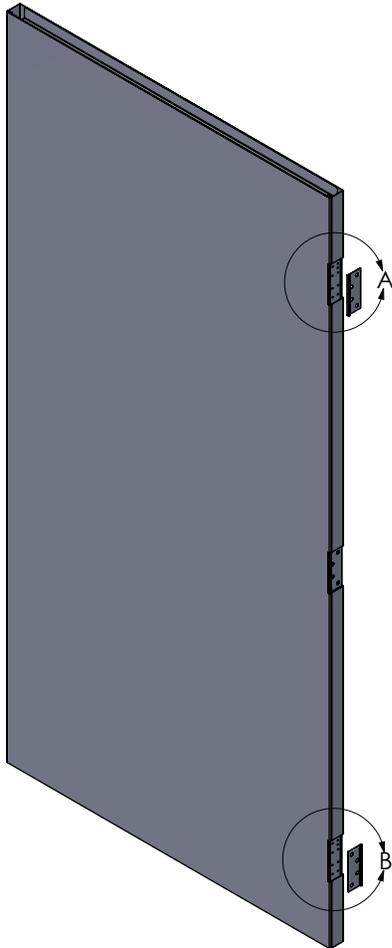


DETAIL A

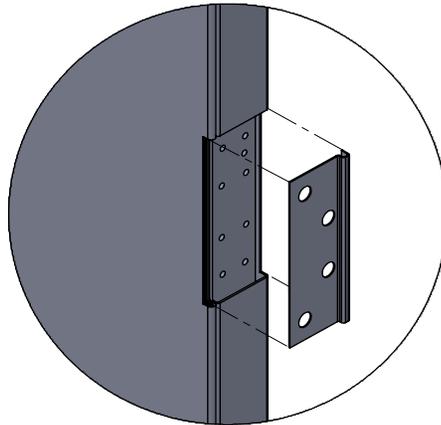

DETAIL B

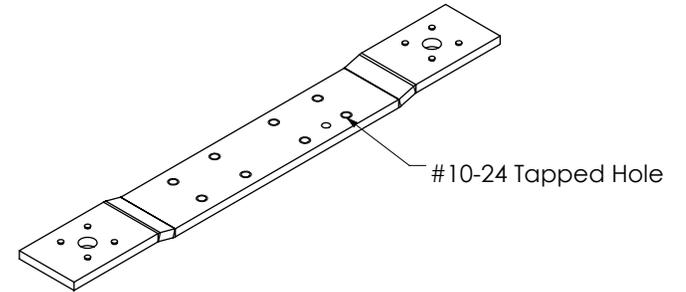

NONHANDED HINGE REINFORCEMENT

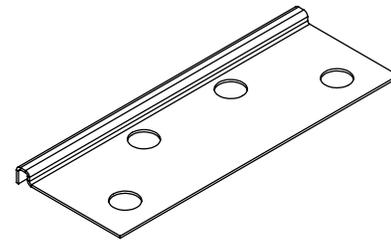

HINGE FILLER PLATE FOR 4 1/2" HINGE